



PORTAFILIERA ROTANTE
ROTATING DIE-HOLDER

CFRMD



PORTAFILIERA ROTANTE


Caratteristiche e vantaggi:

- disponibile in 3 diverse misure per coprire la gamma da 38mm a 70mm.
- può essere fornita con raffreddamento diretto (l'acqua di raffreddamento bagna direttamente la filiera) oppure indiretto.
- il movimento rotatorio permette una migliore lubrificazione del filo e una maggiore durata della filiera.
- la forma tonda della filiera viene preservata.
- maggiore velocità di trafilatura.
- riduzione fermi macchina (dovuti a rotture filo e cambi filiera).

ROTATING DIE-HOLDER

Features and benefits:


- 3 sizes available to cover the die diameter range from 38mm up to 70mm.
- Can be supplied with direct (the cooling water flows directly on the die) or indirect cooling system.
- Rotary movement that allows better lubrication on the wire and longer life of the die.
- Round shape of the die maintained for a longer period.
- Increased drawing speed.
- Reduced machine down times (due to wire breaks and die changes).

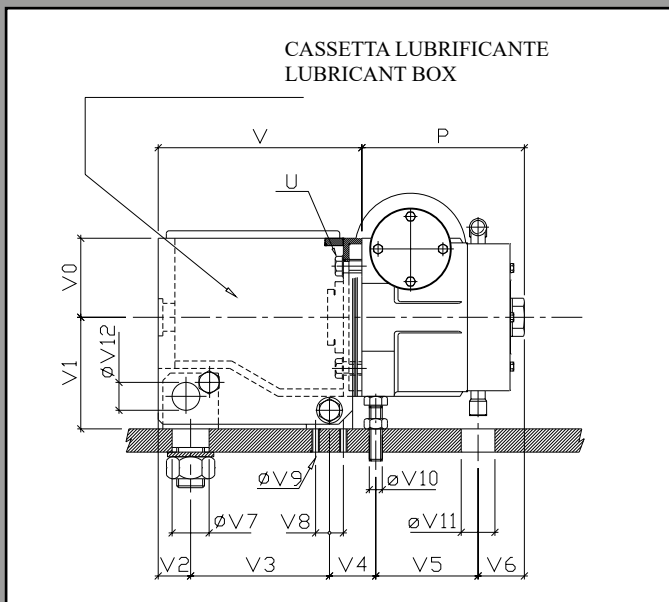


TIPO/TYPE	casseta/ box	V	V0	V1	V2	V3	V4	V5
CFRMD431	CC	240	70	105	38	165	50	92
	CL	340				265		
CFRMD551	CC	240	85	120	38	165	50	113
	CL	340				265		
CFRMD701	CC	290	100	140	43	215	60	132
	CL	400			43	315	60	

TIPO/TYPE	cassetta/ box	V6	V7	V8	V9	V10	V11	V12
CFRMD431	CC	45	50	35	M8	M14	40	30
	CL							
CFRMD551	CC	50	50	35	M8	M14	40	30
	CL							
CFRMD701	CC	56	60	30	M10	M14	40	40
	CL							

CL= CASSETTA LUNGA / LONG BOX
CC= CASSETTA CORTA / SHORT BOX

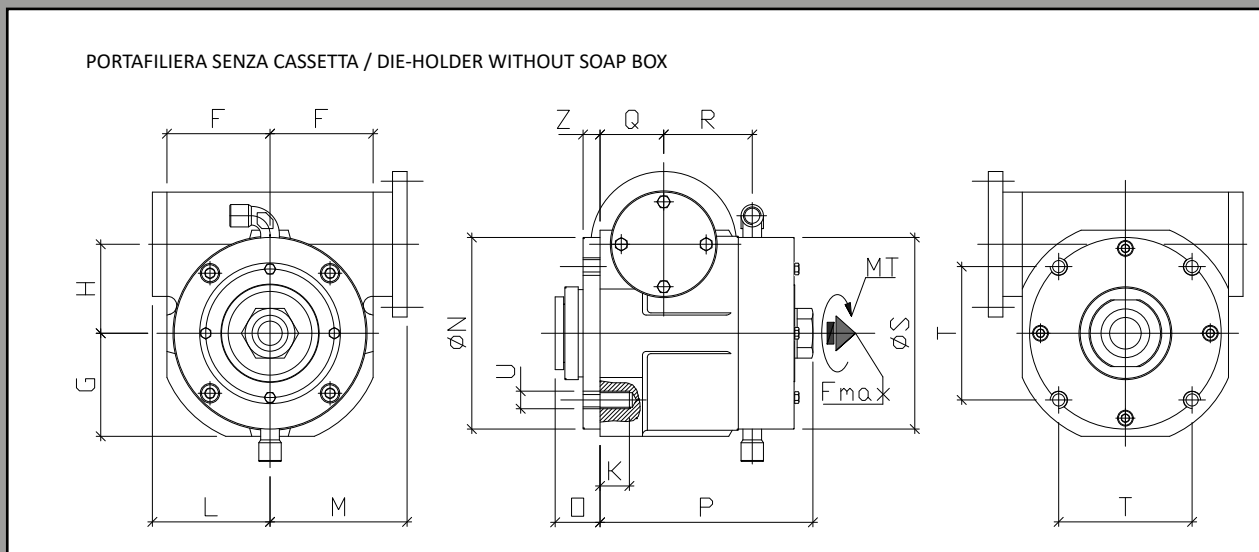

TYPE		SPEED (RPM)	MOTOR (kW)	MT	F Max (kg)	d	A	B	C	D	E	F	G	H	L	M	N	O	P	Q	R	S	T	U	K	Z
CFRMD431	V	48	0.37	7	2500	43	250	172	112	309	126	70	70	56.5	80	90	130	37	150	45	58	128	88	m10	22	10
	L	7	0.18	17																						
CFRMD551	V	42	0.75	14	5000	55	307	204	136	346	152	85	85	73.5	97	113	158	37	176	52.5	73	158	110	m14	25	14
	L	6	0.37	40																						
CFRMD701	V	42	0.75	14	10000	70	318	209	142	357	157	100	100	79	112	124	179	39	206	59	91	179	127	m16	40	16
	L	6	0.37	10																						

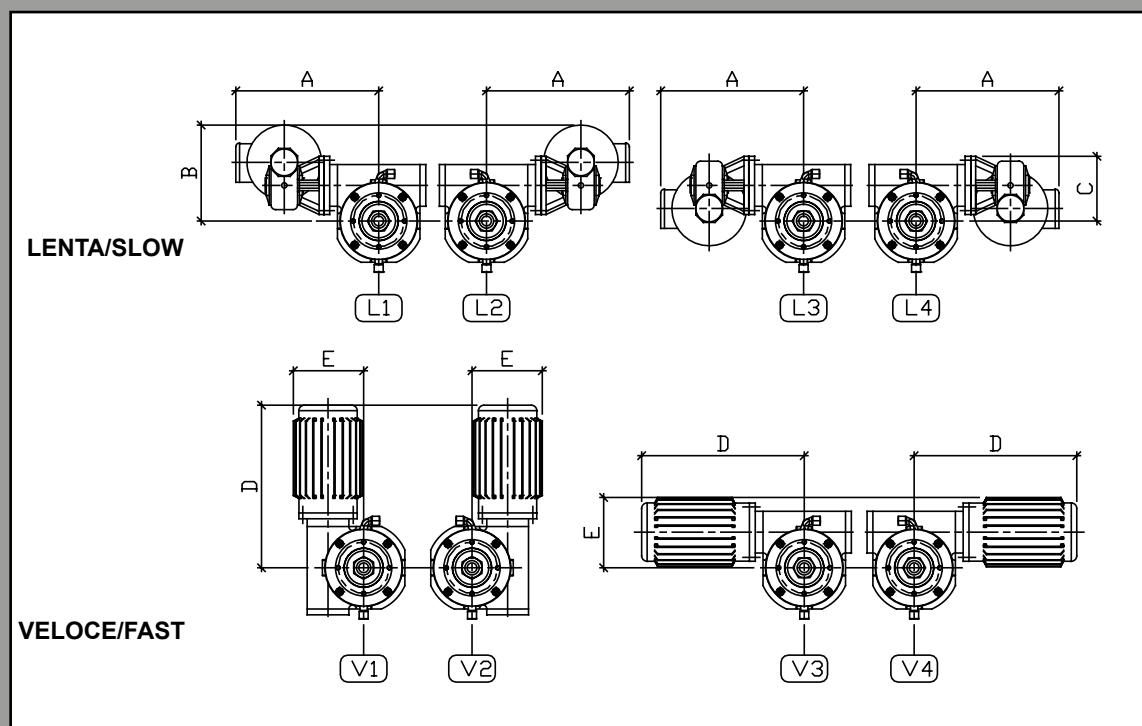

COME ORDINARE IL GIUSTO MODELLO

DIMENSIONE FILIERA: 43X27mm= CFRMD431 53x40mm=CFRMD551 70x40mmCFRMD701

Per dimensioni diverse dalle standard sopra elencate comunicare diametro esterno e lunghezza totale. Potrà essere applicato un sovrapprezzo.

VELOCITA': indicare se si desidera il modello veloce oppure lento: VELOCE=V LENTO= L (vedere rif.to giri/min. nella tabella a pg.3).

CASSETTA PORTASAPONE: indicare con o senza. Se si desidera avere la cassetta portasapone indicare se lunga o corta (vedere dimensioni a pg 2).

CASSETTA LUNGA =CL CASSETTA CORTA= CC

VERSIONI DI MONTAGGIO: indicare la versione di montaggio desiderata scegliendo tra le variati del disegno a pg.3:

per modello veloce: V1-V2-V3-V4; per modello lento: L1-L2-L3-L4

LE PORTAFILIERE VENGONO FORNITE DA STANDARD CON RAFFREDDAMENTO DIRETTO; IN CASO FOSSE NECESSARIO IL RAFFREDDAMENTO INDIRETTO (senza fori sul canotto) OCCORRE INDICARLO SULL'ORDINE.

HOW TO PLACE AN ORDER

DIE DIMENSIONS: 43X27mm= CFRMD431 53x40mm=CFRMD551 70x40mmCFRMD701.

If the dimensions are different from the standard-ones indicated above, please let Cometo know the maximum external diam. and overall length.

In this case you may be charged with an overprice.

SPEED: to be indicated if fast or slow model is required: FAST=V SLOW=L (see ref. for rpm in the table at pg. 3).

SOAP BOX: to be indicated if with or without soap box. In case the box is needed, please indicate if long or short (see dimensions in the table at pg 2)

LONG BOX = CL SHORT BOX= CC

ASSEMBLY VERSIONS: assembly version to be indicated, see reference drawing at pg.3:

for fast model V1-V2-V3-V4 ; for slow model: L1-L2-L3-L4

THE STANDARD DIE-HOLDERS ARE SUPPLIED WITH DIRECT COOLING SYSTEM- IF YOU NEED THE INDIRECT-ONE (without holes on the shaft) PLEASE INDICATE IT WHEN MAKING THE PURCHASE ORDER.

MODELLO MODEL	DIMENSIONI FILIERA DIE-DIMENSIONS	CASSETTA BOX	VERSIONE MONTAGGIO ASSEMBLY VERSION
CFRMD431	43X27mm	CC	V1-V2-V3-V4
			L1-L2-L3-L4
		CL	V1-V2-V3-V4
			L1-L2-L3-L4
		senza c. without box	V1-V2-V3-V4
			L1-L2-L3-L4
CFRMD551	53x40mm	CC	V1-V2-V3-V4
			L1-L2-L3-L4
		senza c. without box	V1-V2-V3-V4
			L1-L2-L3-L4
		CL	V1-V2-V3-V4
			L1-L2-L3-L4
CFRMD701	70x40mm	CC	V1-V2-V3-V4
			L1-L2-L3-L4
		CL	V1-V2-V3-V4
			L1-L2-L3-L4
		senza c. without box	V1-V2-V3-V4
			L1-L2-L3-L4



AITMAC, INC

ADVANCED INDUSTRIAL TECHNOLOGIES & MACHINES, INC

329 Rayette Rd, Unit 14, Concord, Ontario, L4K 2G1, Canada

E-mail: sales.aitmac.ca@gmail.com • www.aitmac-ca.com

Tel: (905) 761-6165 • Fax: (905) 761-6168